

RVON Reusable push-in wire connectors

U_i 450 V	V0 UL94			I_n max. 32 A	T_a -10...+85 °C	IP 20
----------------	-------------------	--	--	-----------------------	-----------------------	-----------------

TRACON	mm ²	L (mm)	W (mm)	H (mm)
RVON2	2 × 0.2-4	13.2	20.1	9.5
RVON3	3 × 0.2-4	18.8	20.1	9.5
RVON5	5 × 0.2-4	30	20.1	9.5




RVON2



RVON3



RVON5



OVO2,5-2



OVO2,5-3

OVO2,5-5




OVOT2,5-2




OVOT2,5-3

OVOT2,5-5



V0 UL94			U_i 400 V	IP 20	I_n max. 32 A	T_a -10...+55 °C
-------------------	--	--	----------------	-----------------	-----------------------	-----------------------

TRACON	mm ²	L (mm)	W (mm)	H (mm)
OVO2,5-2	2 × 0.5-4	12.4	20.5	14.5
OVO2,5-3	3 × 0.5-4	17	20.5	14.5
OVO2,5-5	5 × 0.5-4	26.6	20.5	14.5
OVOT2,5-2	2 × 0.5-4	12.4	20.5	14.5
OVOT2,5-3	3 × 0.5-4	17	20.5	14.5
OVOT2,5-5	5 × 0.5-4	26.6	20.5	14.5

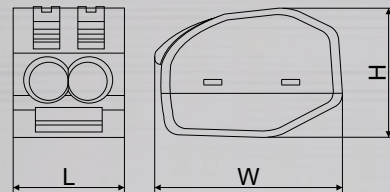

V0 UL94			U_i 400 V	IP 20	I_n max. 24 A	T_a -10...+55 °C
-------------------	--	--	----------------	-----------------	-----------------------	-----------------------

TRACON	mm ²		L (mm)	W (mm)	H (mm)
OLC11D	1×0,5-2,5	1×0,5-2,5	42.6	10.6	16.4
OLC11 ○	1×1-2,5	1×0,5-2,5	20.5	8.1	15.1
OLC21 ○	2×1-2,5	1×0,5-2,5	20.5	9.7	15.6

OLC11



OLC11D



OLC21

